


TECHNICAL SPECIFICATIONS



- Dimensions:** 55 - 57 cm seat centre
50.5 cm depth
95 cm height
- Backrest:** Cold moulded polyurethane foam 'UNIBLOCK 2' system, which wraps an injected polypropylene frame completely. All this structure is protected by a texturized injected polypropylene seat shell. Polyurethane density 55 Kg/m³.
- Seat:** Cold moulded polyurethane foam 'UNIBLOCK 2' system, which wraps an injected polypropylene frame completely. All this structure is protected by a texturized injected polypropylene seat shell. The seat pan folds by means of an automatic noiseless maintenance-free double spring. Polyurethane density 65 Kg/m³.
- Side panel:** Texturized injected polypropylene, 70mm. End row panels completely upholstered. Concealed floor fixation system.
- Armrest:** Rectangular texturized injected polypropylene.
- Volume:** 0.15 m³ / unit
- Weight:** 16 Kg not assembled

ARGENTINA PLUS

DRAWING

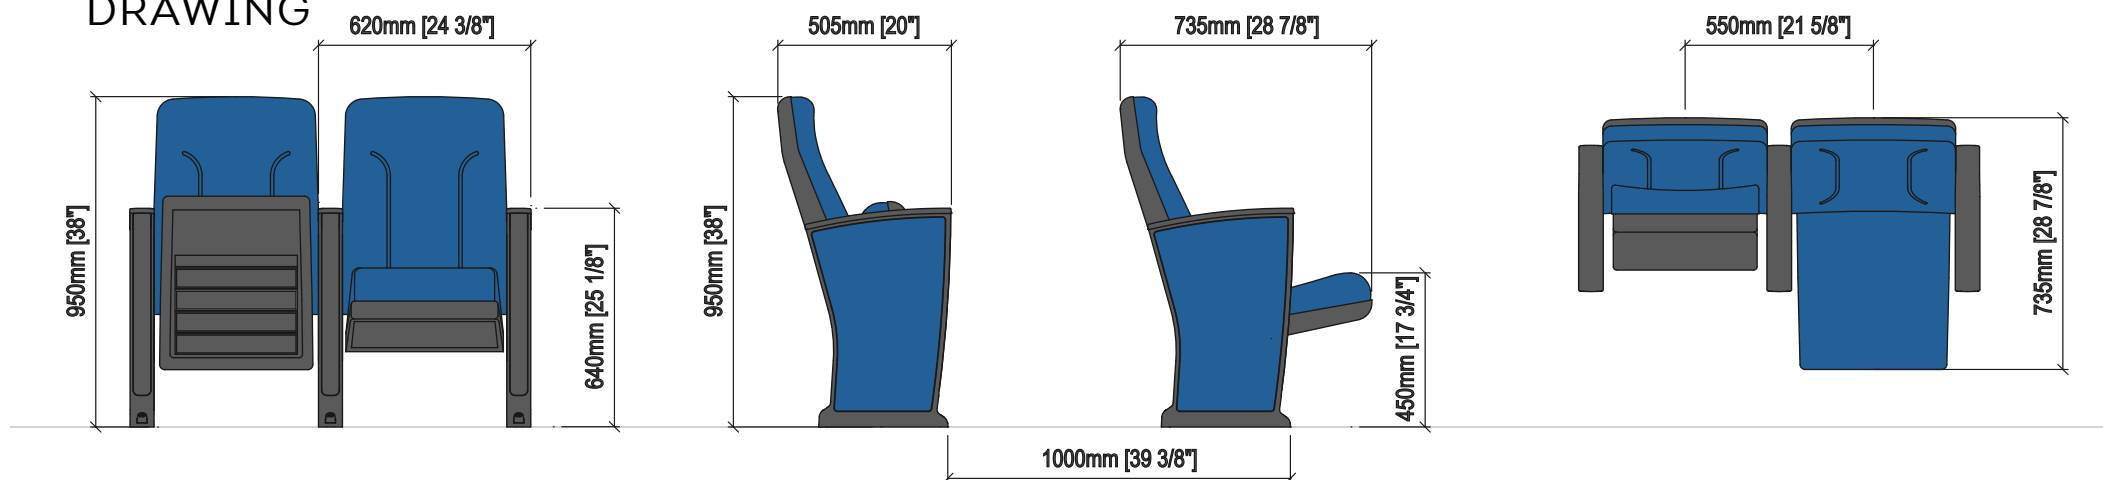

OPTIONS



Fixation to the floor




Slope



Movable seat




Ref 975 (More upright backrest)



Embroidered logo



Row labels



Seating numbering



Desk

CERTIFICATES

BS 5852:2006

BS-EN 1021-1:2006

CAL TB 117-2013, SECTION 1

UNE 23.727-90 1R (M1)

UNE-EN 1021-1:2006 / UNE-EN 1021-2:2006

BS 5852:1979 Parte 1

Fabrics	Fire Barrier	Foam	Seat
•			
•			
•			
•	•		
•	•	•	•
	•		



Euro Seating reserves the right to modify the dimensions and characteristics without prior notice. All dimensions and specifications are given for information purposes only.