

TECHNICAL SPECIFICATIONS



Dimensions: 54-56 cm seat centres
48.5 cm depth
97 cm height

Backrest: Beech solid wood structure over which a MDF board is fixed and in turn, an open cell polyurethane foam block, upholstered by means of a fabric cover, is also fixed. Foam density, 40 Kg/m³

Seat: Cold moulded polyurethane foam which wraps an injected polypropylene frame completely. It is later upholstered by means of a fabric cover. The seat pan folds by means of an automatic noiseless maintenance-free double spring. Polyurethane density 65 Kg/m³.

Side panel: Wood fibres board, finish in beech. Concealed floor fixation system by means of a steel plinth.


Armrest: Included in the very side panel.

Volume: 0.14 m³ por unidad


Weight: 25.50 Kg desmontada



DRAWING

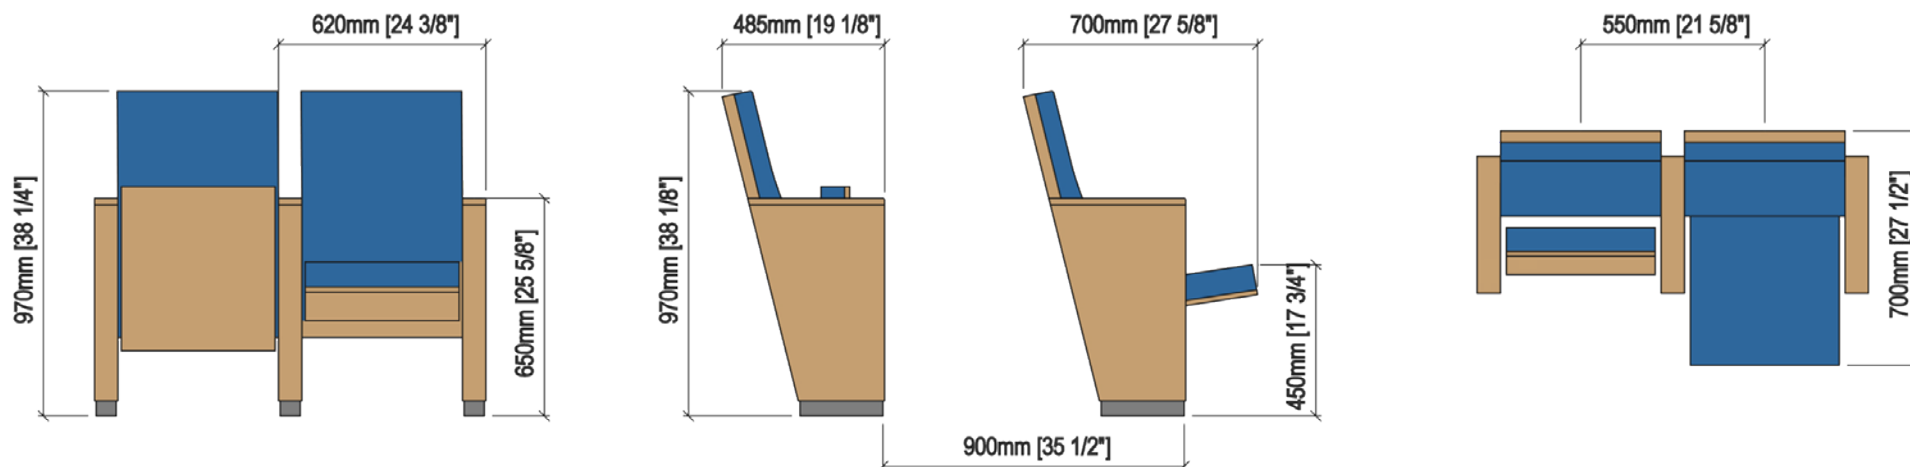

OPTIONS

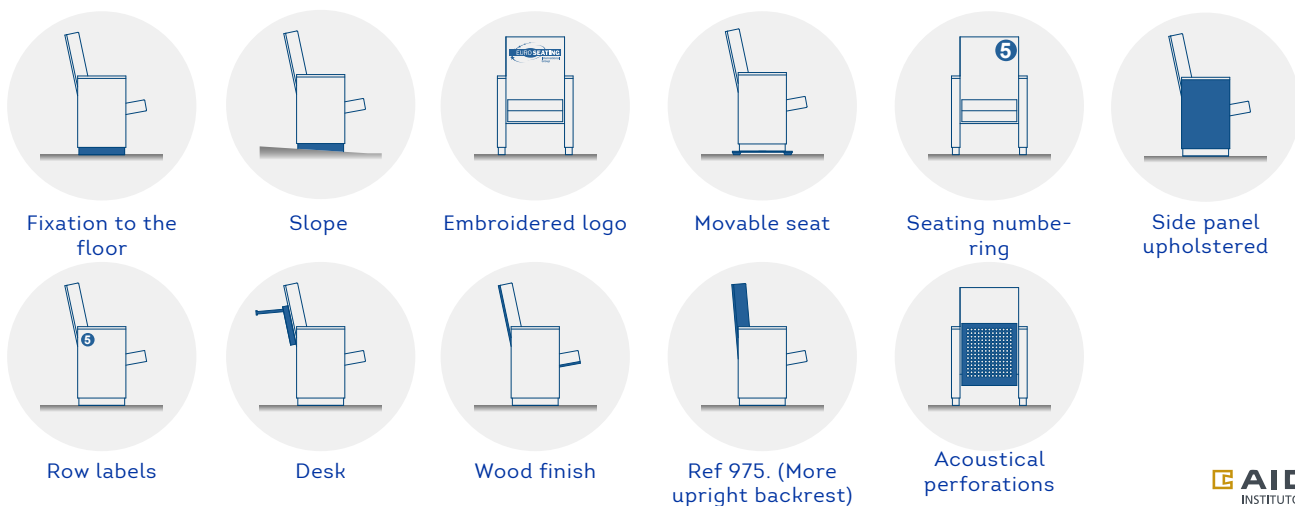

CERTIFICATES

BS 5852:2006
BS-EN 1021-1:2006
CAL TB 117-2013, SECTION 1
UNE 23.727-90 1R (M1)
UNE-EN 1021-1:2006 / UNE-EN 1021-2:2006
BS 5852:1979 Parte 1

Fabrics	Fire Barrier	Foam	Seat
•			
•			
•			
•	•		
•	•	•	•
	•		