

DIAMOND V05

Millenium Series

TECHNICAL SPECIFICATIONS




- Dimensions:** 55 - 58 cm seat centres
73.5 cm depth
100 cm + 13 cm height
- Backrest:** Cold moulded polyurethane foam 'UNIBLOCK 2' system, which wraps an injected polypropylene frame completely. All this structure is protected by a texturized injected polypropylene seat shell.
Polyurethane density 55 Kg/m³
- Seat:** Cold moulded polyurethane foam 'UNIBLOCK 2' system, which wraps an injected polypropylene frame completely. All this structure is protected by a texturized injected polypropylene seat shell.
Fixed in open position, anchored to the side panel by means of steel plates.
Polyurethane density 65 Kg/m³
- Side panel:** Texturized injected polypropylene, 40mm
End row panels completely upholstered.
Concealed floor fixation system.
- Armrest:** Texturized injected polypropylene, including integrated cupholder.
- Volume:** 0.18 m³ / unit
- Weight:** 20.70 Kg not assembled

DIAMOND V05

Millenium Series

DIMENSIONS AND DRAWING

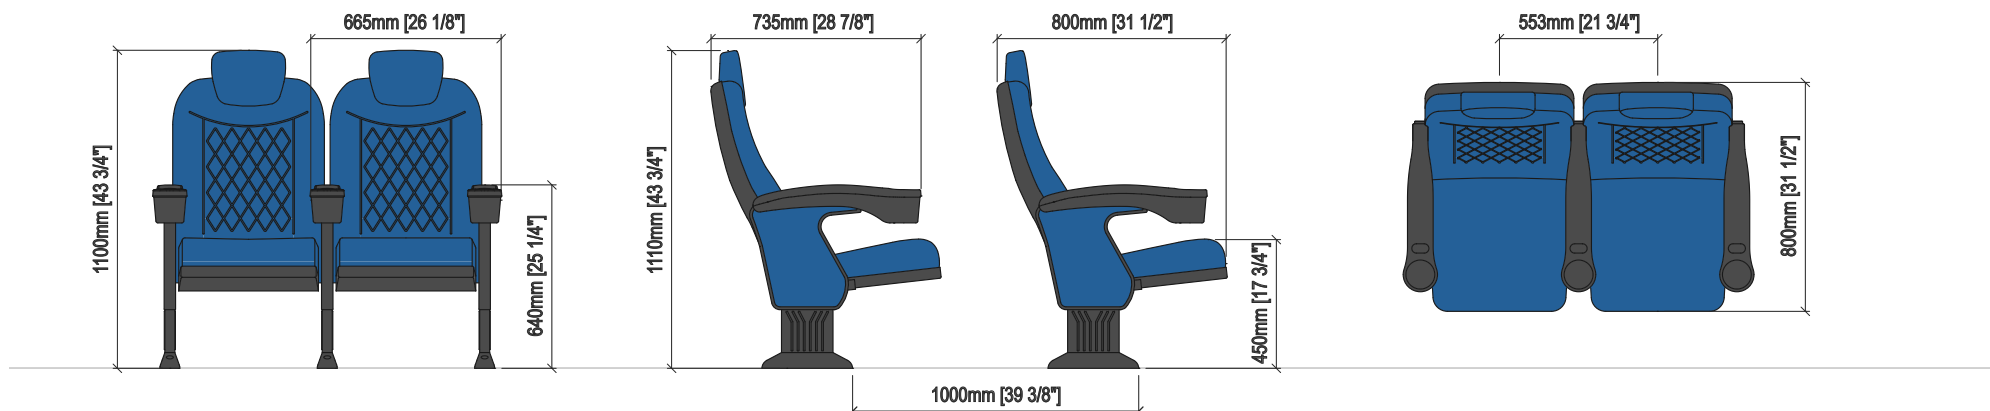

OPTIONS



Fixation to the floor



Slope




Movable seat



Ref 975 (more upright backrest)



Headrest



Embroidered logo



Row labels



Seating numbering



Tip-up seat

CERTIFICATES

BS 5852:2006

BS-EN 1021-1:2006

CAL TB 117-2013, SECTION 1

UNE 23.727-90 1R (M1)

UNE-EN 1021-1:2006 / UNE-EN 1021-2:2006

BS 5852:1979 Parte 1

Fabric	Fire Barrier	Foam
•		
•		
•		
•	•	
•	•	•
	•	

AIDIMA
INSTITUTO TECNOLÓGICO
MUEBLES, MADERA, EMBALAJES Y AFINES

ffmo
FEDERATION OF FURNITURE
MANUFACTURERS OF EUROPE

Member of
FIRA
FEDERATION OF
INTERNATIONAL
FURNITURE ASSOCIATIONS

ISO 9001
BUREAU VERITAS
Certification

ISO 14001
BUREAU VERITAS
Certification

AENOR
Ecodiseño
UNE-EN ISO 14001

Euro Seating reserves the right to modify the dimensions and characteristics without prior notice. All dimensions and specifications are given for information purposes only.