




TECHNICAL SPECIFICATIONS

- Dimensions:** 54 - 56 cm seat centres
52 cm depth
95 cm height
- Backrest:** Cold moulded polyurethane foam 'UNIBLOCK 2' system, which wraps an injected polypropylene frame completely. All this structure is protected by a texturized injected polypropylene seat shell.
Polyurethane density 55 Kg/m³
- Seat:** Cold moulded polyurethane foam 'UNIBLOCK 2' system, which wraps an injected polypropylene frame completely. All this structure is protected by a texturized injected polypropylene seat shell.
The seat pan folds by means of an automatic noiseless maintenance-free double spring.
Polyurethane density 65 Kg/m³
- Side Panel:** Texturized injected polypropylene, 60mm
Anti-panic polystyrene writing pad system with interior steel structure, located in the interior of the side panel.
End row panels completely upholstered.
Concealed floor fixation system.
- Armrest:** Rounded texturized injected polypropylene.
- Volume:** 0.16 m³ / unit
- Weight:** 18.80 Kg not assembled


ECO 100 PL

Millenium Series

DRAWING

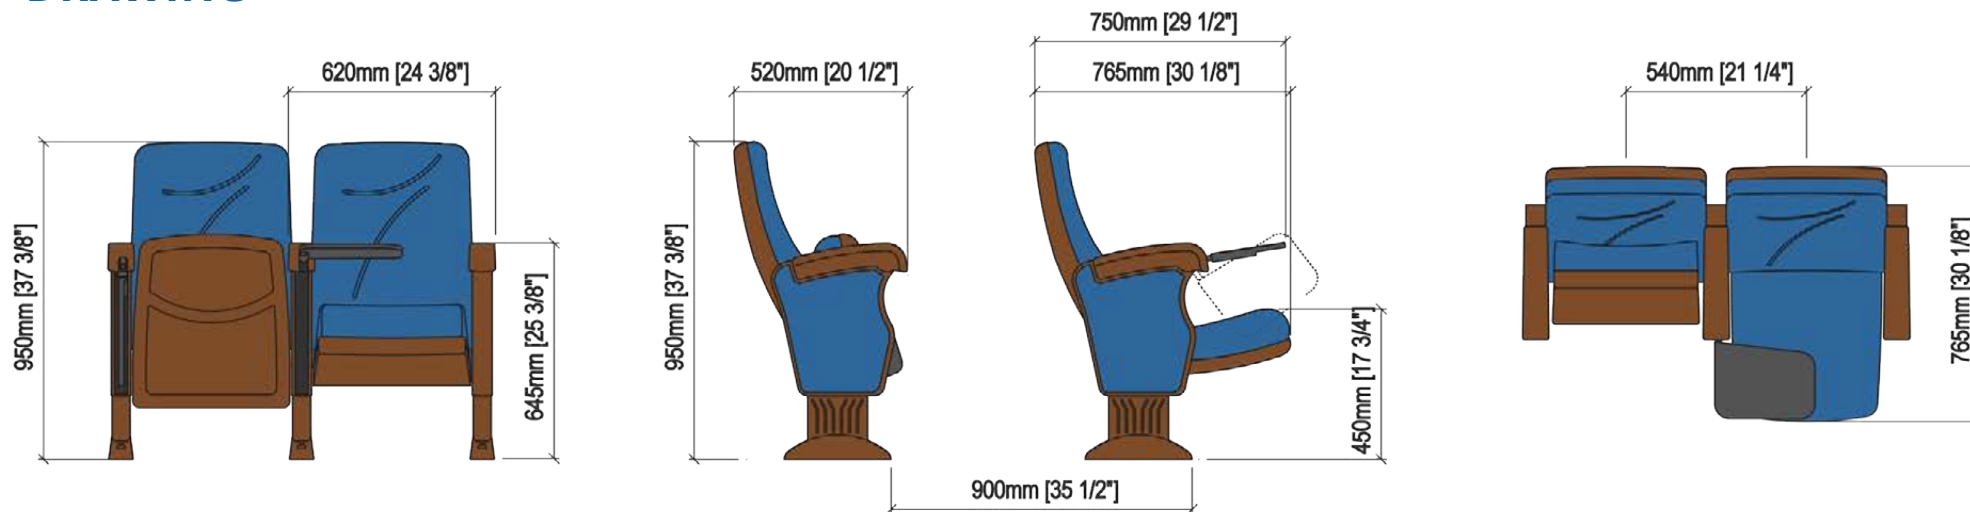

OPTIONS

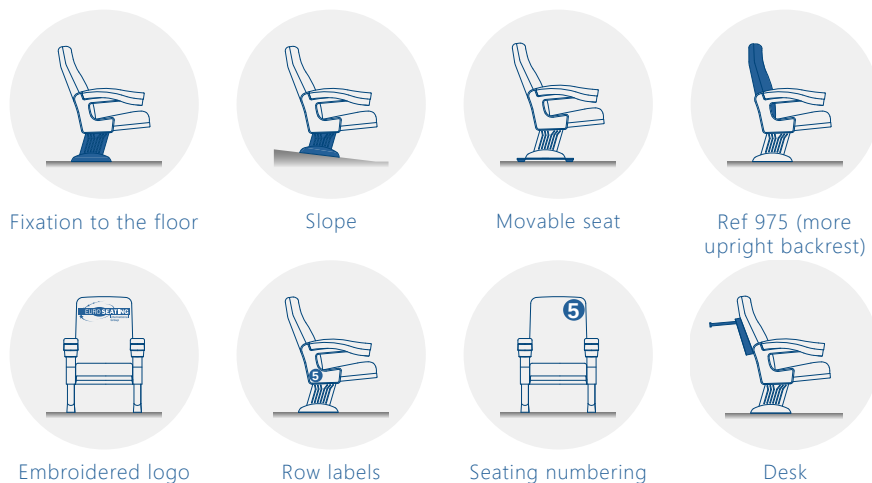

CERTIFICATES

BS 5852:2006
BS-EN 1021-1:2006
CAL TB 117-2013, SECTION 1
UNE 23.727-90 1R (M1)
UNE-EN 1021-1:2006 / UNE-EN 1021-2:2006
BS 5852:1979 Parte 1

Fabric	Fire Barrier	Foam
•		
•		
•		
•	•	
•	•	•
	•	