

KING FOOTREST

TECHNICAL SPECIFICATIONS



Dimensions: 60 a 62 cm seat centres
68 cm depth
101 cm height

Backrest: Fully upholstered by means of a fabric cover, made up of an open cell polyurethane foam block which wraps an injected polypropylene frame completely. Different options of backrest drawing. Polyurethane density 55 Kg/m³.

Seat: Fully upholstered by means of a fabric cover, made up of an open cell polyurethane foam block which wraps an injected polypropylene frame completely. Fixed in open position, anchored to the side panel by means of steel plates. Polyurethane density 65 Kg/m³.

Side panel: Texturized injected polypropylene, 80mm
End row panels completely upholstered.
Concealed floor fixation system.


Armrest: Fully upholstered

Volume: 0.240 m³/unit


Weight: 22 Kg not assembled

KING FOOTREST

DRAWING

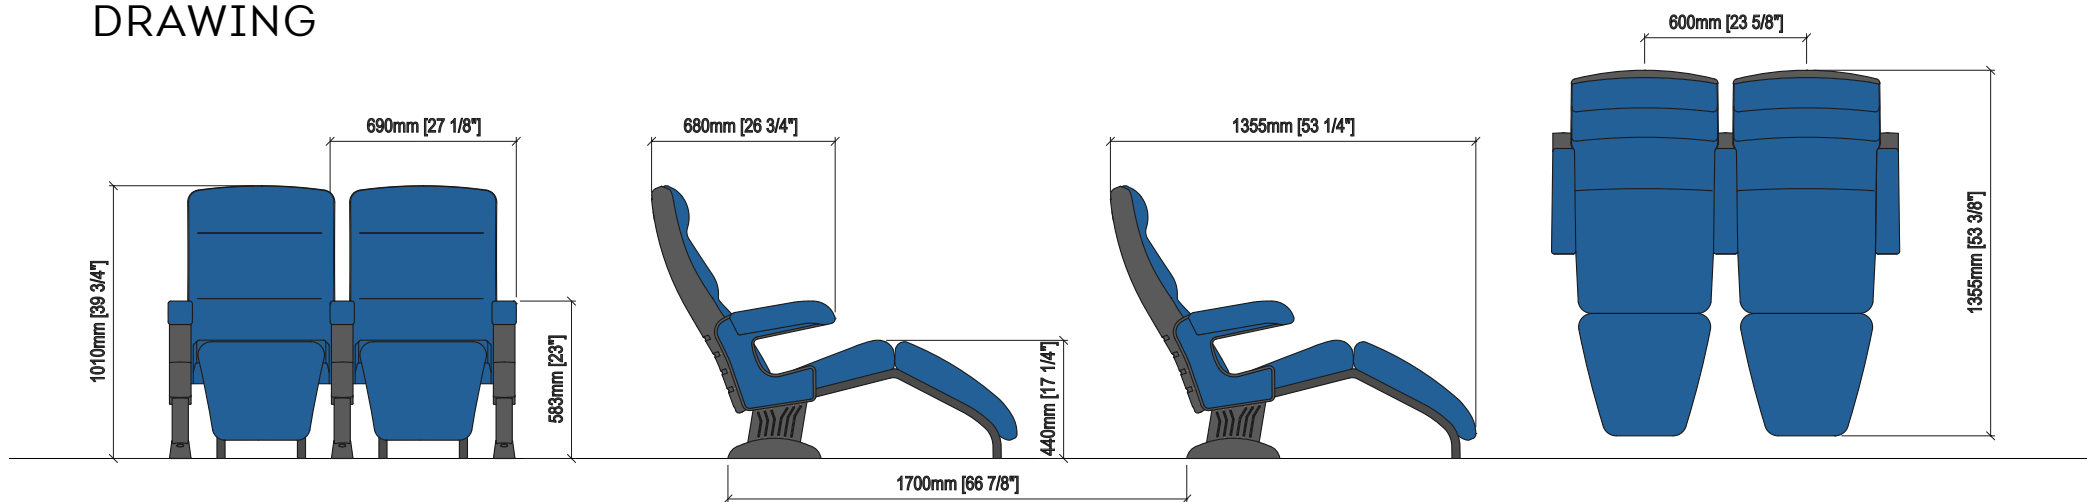

OPTIONS

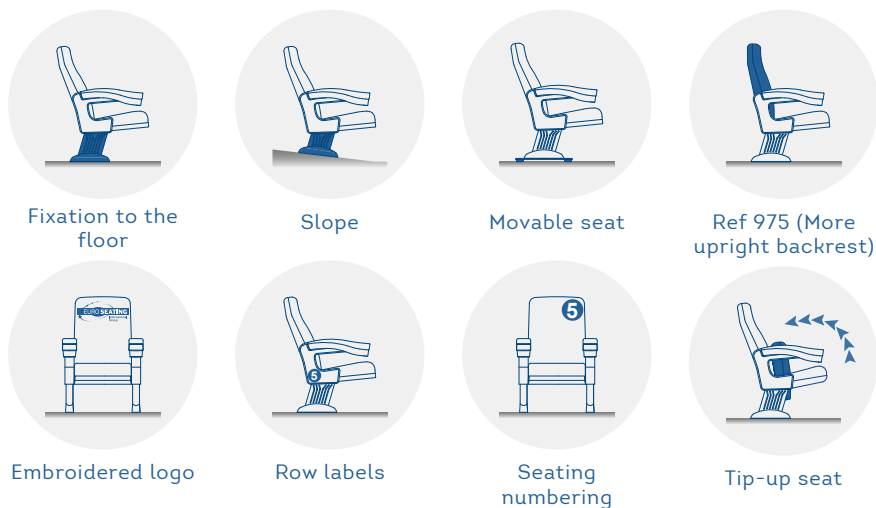

CERTIFICATES

	Fabrics	Fire barrier	Foam
BS 5852:2006	•		
BS-EN 1021-1:2006	•		
CAL TB 117-2013, SECTION 1	•		
UNE 23.727-90 1R (M1)	•	•	
UNE-EN 1021-1:2006 / UNE-EN 1021-2:2006	•	•	•
BS 5852:1979 Parte 1		•	