

KING RUBY V03

TECHNICAL SPECIFICATIONS



Dimensions: 56 a 58 cm seat centres
82,5 cm depth
110 cm height

Backrest: Cold moulded polyurethane foam 'UNIBLOCK' system, which wraps an injected polypropylene frame completely. All this structure is protected by a texturized injected polypropylene seat shell. Different options of backrest drawing. Polyurethane density 55 Kg/m³.

Seat: Cold moulded polyurethane foam 'UNIBLOCK' system, which wraps an injected polypropylene frame completely. All this structure is protected by a texturized injected polypropylene seat shell. The seat pan folds by means of an automatic noiseless maintenance-free double spring. Polyurethane density 65 Kg/m³.

Side panel: Texturized injected polypropylene, 40mm. End row panels completely upholstered. Concelaed floor fixation system.

Armrest: Texturized injected polypropylene, including integrated cupholder.

Volume: 0.180 m³/unit


Weight: 18.20 Kg not assembled




Euro Seating reserves the right to modify the dimensions and characteristics without prior notice. All dimensions and specifications are given for information purposes only.

KING RUBY V03

DRAWING

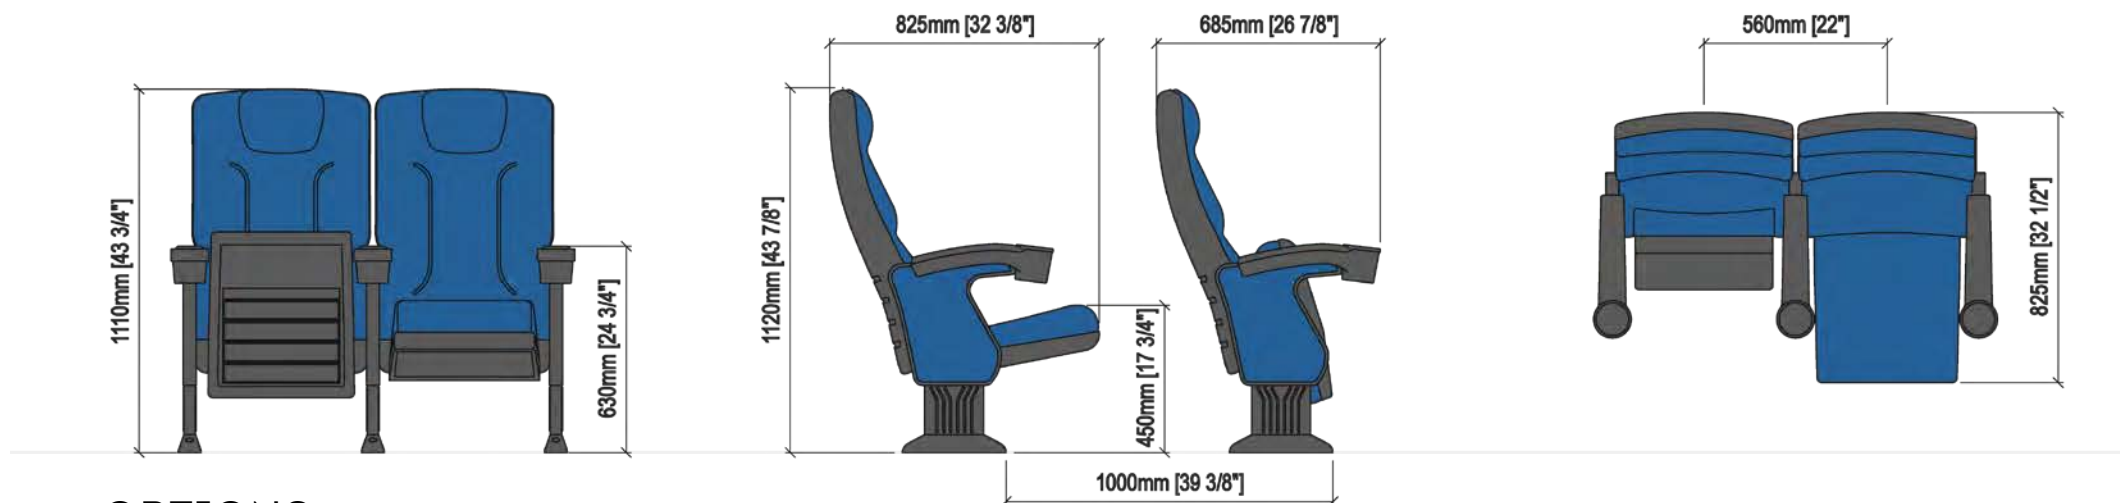

OPTIONS

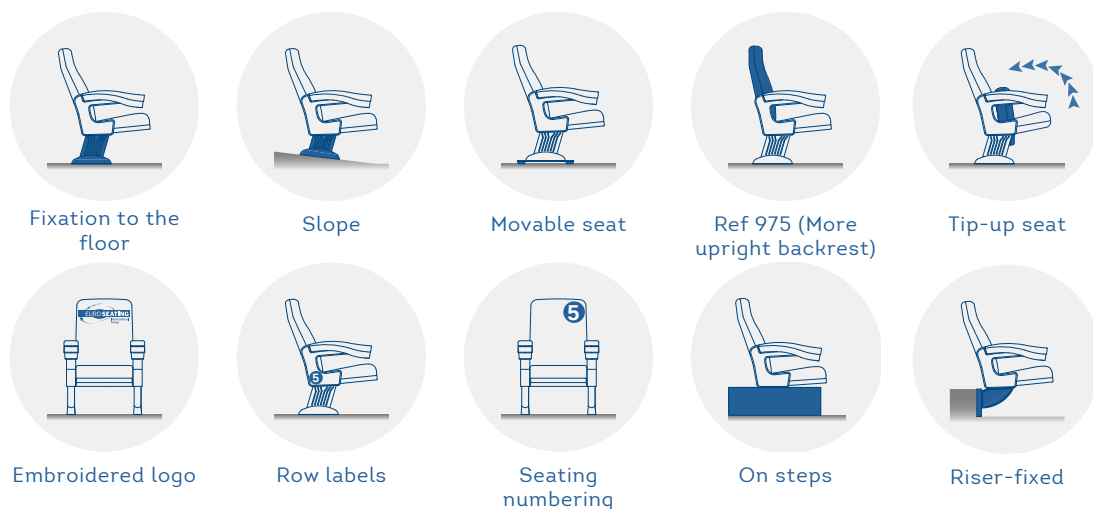

CERTIFICATES

	Fabrics	Fire barrier	Foam
BS 5852:2006	•		
BS-EN 1021-1:2006	•		
CAL TB 117-2013, SECTION 1	•		
UNE 23.727-90 1R (M1)	•	•	
UNE-EN 1021-1:2006 / UNE-EN 1021-2:2006	•	•	•
BS 5852:1979 Part 1		•	