

TECHNICAL SPECIFICATIONS



Dimensions: 53 - 57 cm seat centres
55 cm depth
86 cm height

Backrest: Structure fixed over an open cell polyurethane foam block upholstered by means of a fabric cover, which wraps an injected polypropylene frame completely. All this structure is protected by a texturized injected polypropylene seat shell.
Foam density 25 Kg/m³.

Seat: Structure fixed over an open cell polyurethane foam block upholstered by means of a fabric cover, which wraps an injected polypropylene frame completely. All this structure is protected by a texturized injected polypropylene seat shell. The seat pan folds by means of an automatic noiseless maintenance-free double spring.
Foam density 30 Kg/m³

Side panel: Texturized injected polypropylene, reinforced with glass fibre. Anti-panic polystyrene writing pad system. Concelaed floor fixation system.


Armrest: Included in the very side panel

Volume: 0.09 m³/unit


Weight: 12 Kg not assembled

MAIA PL

DRAWING

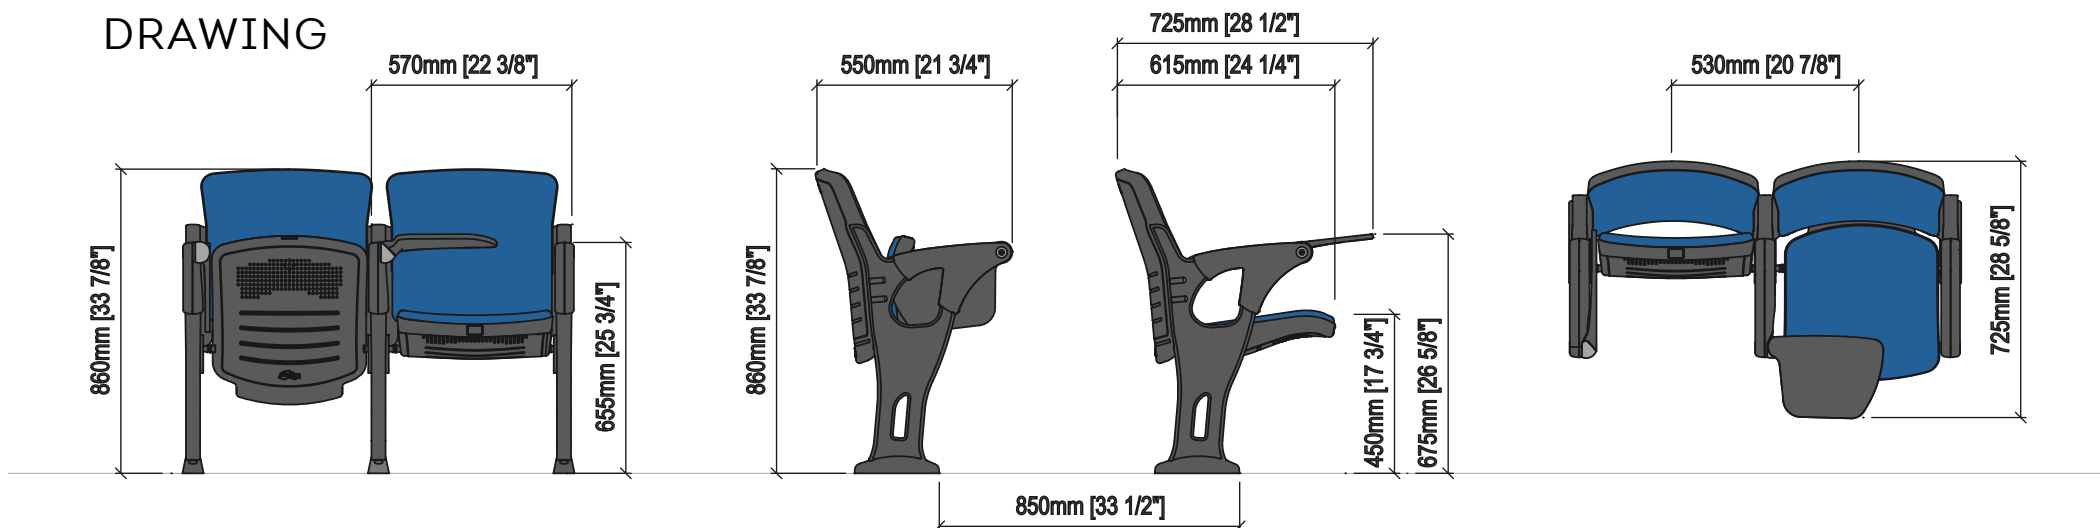

OPTIONS

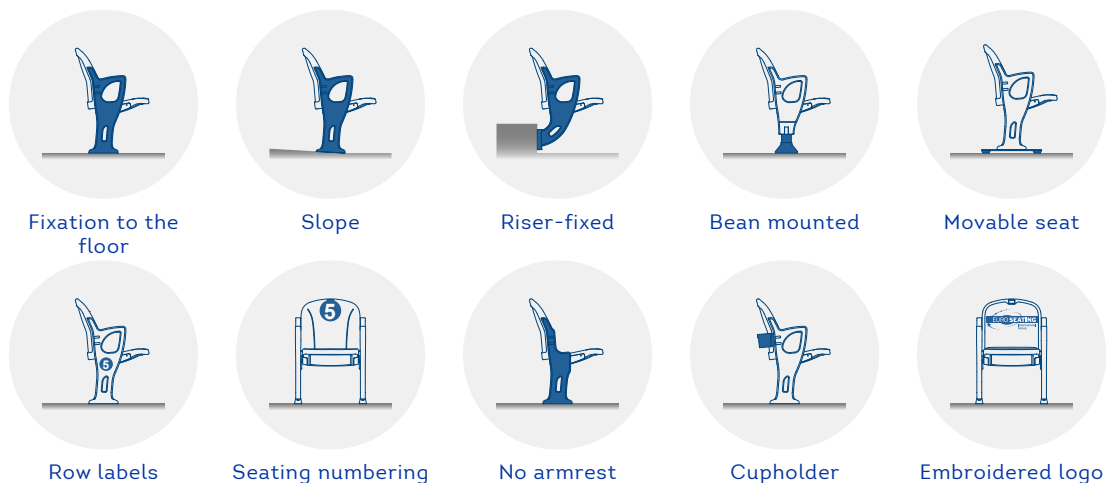

CERTIFICATES

BS 5852:2006
BS-EN 1021-1:2006
CAL TB 117-2013, SECTION 1
UNE 23.727-90 1R (M1)
UNE-EN 1021-1:2006 / UNE-EN 1021-2:2006
BS 5852:1979 Parte 1
UNE 23.727-90 1R (M2 / M3) Opcional
UNE EN 12727:01 Uso Público Severo (Nivel 4)

Fabrics	Fire Barrier	Foam	Plastic	Seat
•				
•				
•				
•	•			
•	•	•		
	•			
			•	
				•

AIDIMA
INSTITUTO TECNOLÓGICO
MUEBLE, MADERA, EMBALAJE Y VINOS

ffmo
FEDERATION OF FURNITURE
MANUFACTURERS OF EUROPE



Euro Seating reserves the right to modify the dimensions and characteristics without prior notice. All dimensions and specifications are given for information purposes only.