

TECHNICAL SPECIFICATIONS



Dimensions: 54-56 cm seat centres
53.5 cm depth
98 cm height

Backrest: Fully upholstered by means of a fabric cover, made up of an open cell polyurethane foam block and a solid wood frame with thin canvas strips. All this structure is protected by a compressed wood cover. Foam density, 40 Kg/m³

Seat: Cold moulded polyurethane foam, which wraps an injected polypropylene frame completely. It is later upholstered by means of a fabric cover. The seat pan folds by means of an automatic noiseless maintenance-free double spring. Polyurethane density 65 Kg/m³


Side panel: Wood fibres board, finish in beech. Anti-panic polystyrene writing pad system with interior steel structure, located in the interior of the side panel. Concealed floor fixation system by means of a steel plinth.

Armrest: Included in the very side panel.


Volume: 0.160 m³/unit

Weight: 23.00 Kg not assembled

DRAWING

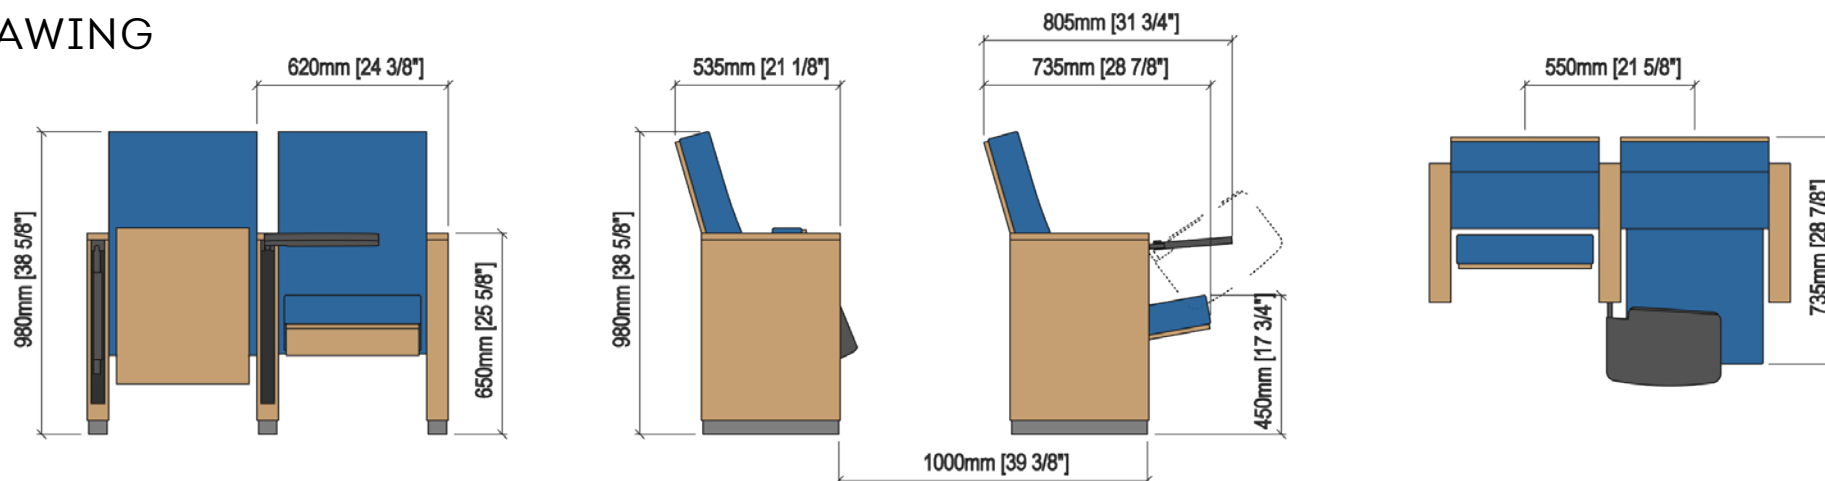

OPTIONS

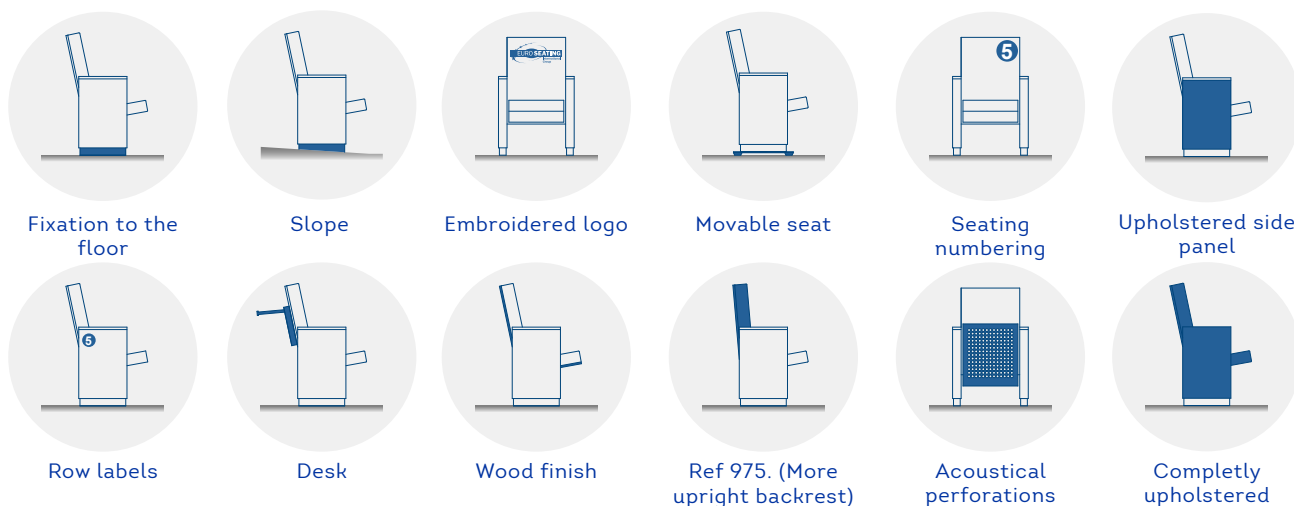

CERTIFICATES

BS 5852:2006
BS-EN 1021-1:2006
CAL TB 117-2013, SECTION 1
UNE 23.727-90 1R (M1)
UNE-EN 1021-1:2006 / UNE-EN 1021-2:2006
BS 5852:1979 Parte 1
Acoustic absorption

Fabrics	Fire Barrier	Foam	Seat
•			
•			
•			
•	•		
•	•	•	•
	•		
	•		•