





TECHNICAL SPECIFICATIONS

- Dimensions:** 55 a 57 cm seat centres
52.5 cm depth
95 cm height
- Backrest:** Cold moulded polyurethane foam, which wraps an injected polypropylene frame completely. It is later upholstered by means of a fabric cover, everything is protected by laminated 3D finish with LYF system. Polyurethane density 55 Kg/m³.
- Seat:** Cold moulded polyurethane foam, which wraps an injected polypropylene frame completely. It is later upholstered by means of a fabric cover. The seat pan folds by means of an automatic noiseless maintenance-free double spring. Polyurethane density 65 Kg/m³.
- Side panel:** Texturized injected polypropylene, 70mm. Anti - panic polystyrene writing pad system with interior steel structure, located in the interior of the side panel. End row panels by laminated 3D finish with LYF system. Concealed floor fixation system.
- Armrest:** Rectangular texturized injected polypropylene, optionally by laminated 3D finish with LYF system.
- Volume:** 0.15 m³ / unit
- Weight:** 21.7 Kg not assembled

DRAWING

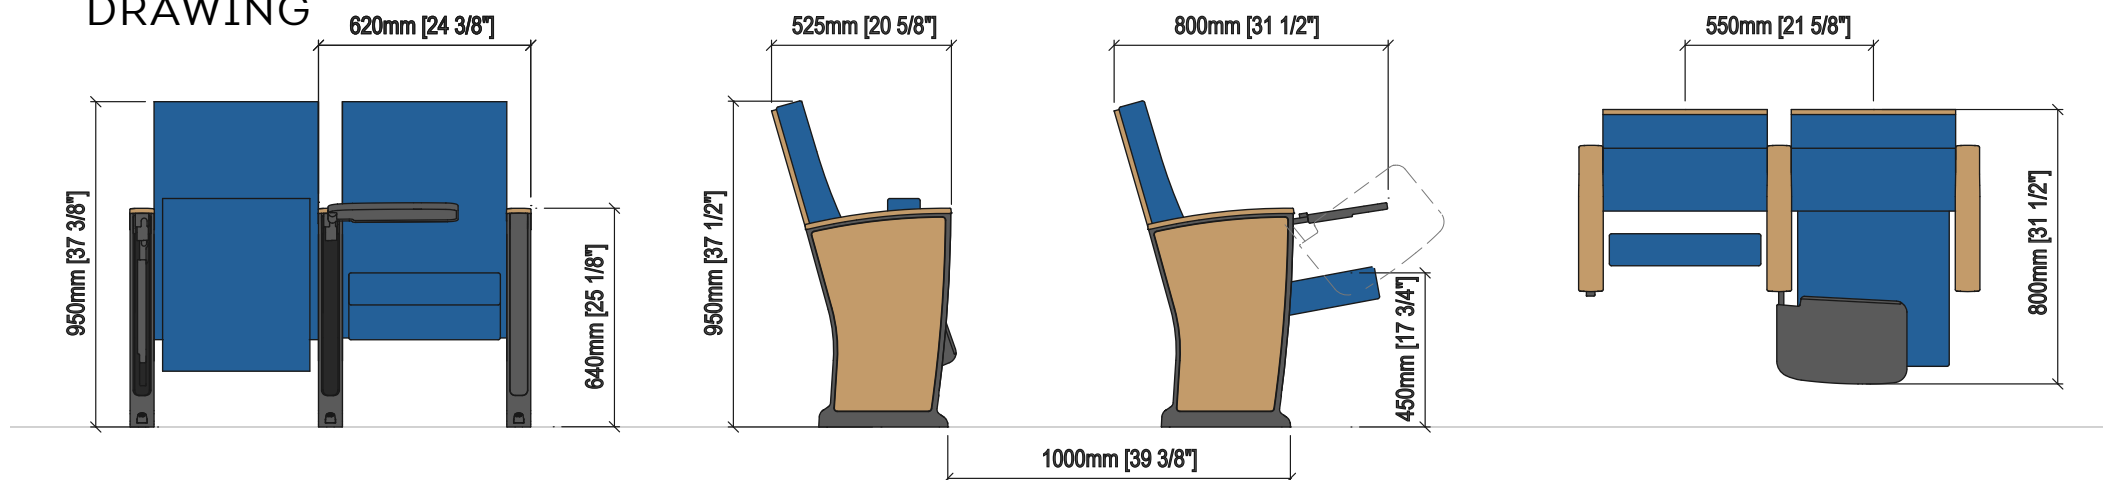

OPTIONS

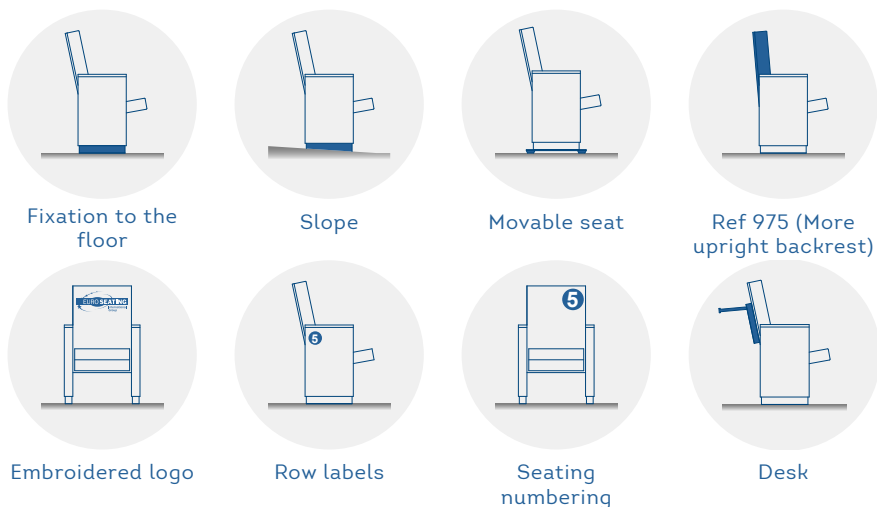

CERTIFICATES

BS 5852:2006

BS-EN 1021-1:2006

CAL TB 117-2013, SECTION 1

UNE 23.727-90 1R (M1)

UNE-EN 1021-1:2006 / UNE-EN 1021-2:2006

BS 5852:1979 Parte 1

Fabrics	Fire barrier	Foam	Seat
•			
•			
•			
•	•		
•	•	•	•
	•		

AIDIMA
INSTITUTO TECNOLÓGICO
MUEBLE, MADERA, EMBALAJE Y VITRIS

fmo
FEDERATION OF
MODERN OFFICE
DESIGNERS



BUREAU VERITAS
ISO 9001
BUREAU VERITAS
Certification

BUREAU VERITAS
ISO 14001
BUREAU VERITAS
Certification



Euro Seating reserves the right to modify the dimensions and characteristics without prior notice. All dimensions and specifications are given for information purposes only.