




TECHNICAL SPECIFICATIONS

- Dimensions:** 55 - 58 cm seat centres
73.5 cm depth
100 cm + 15 cm height
- Backrest:** Cold moulded polyurethane foam 'UNIBLOCK 2' system, which wraps an injected polypropylene frame completely. All this structure is protected by a texturized injected polypropylene seat shell.
Polyurethane density 55 Kg/m³
- Seat:** Cold moulded polyurethane foam 'UNIBLOCK 2' system, which wraps an injected polypropylene frame completely. All this structure is protected by a texturized injected polypropylene seat shell.
Fixed in open position, anchored to the side panel by means of steel plates.
Polyurethane density 65 Kg/m³
- Side panel:** Texturized injected polypropylene, 40mm
End row panels completely upholstered.
Concealed floor fixation system.
- Armrest:** Texturized injected polypropylene, including integrated cupholder.
- Volume:** 0.18 m³ / unit
- Weight:** 18.20 Kg not assembled

DIMENSIONS AND DRAWING

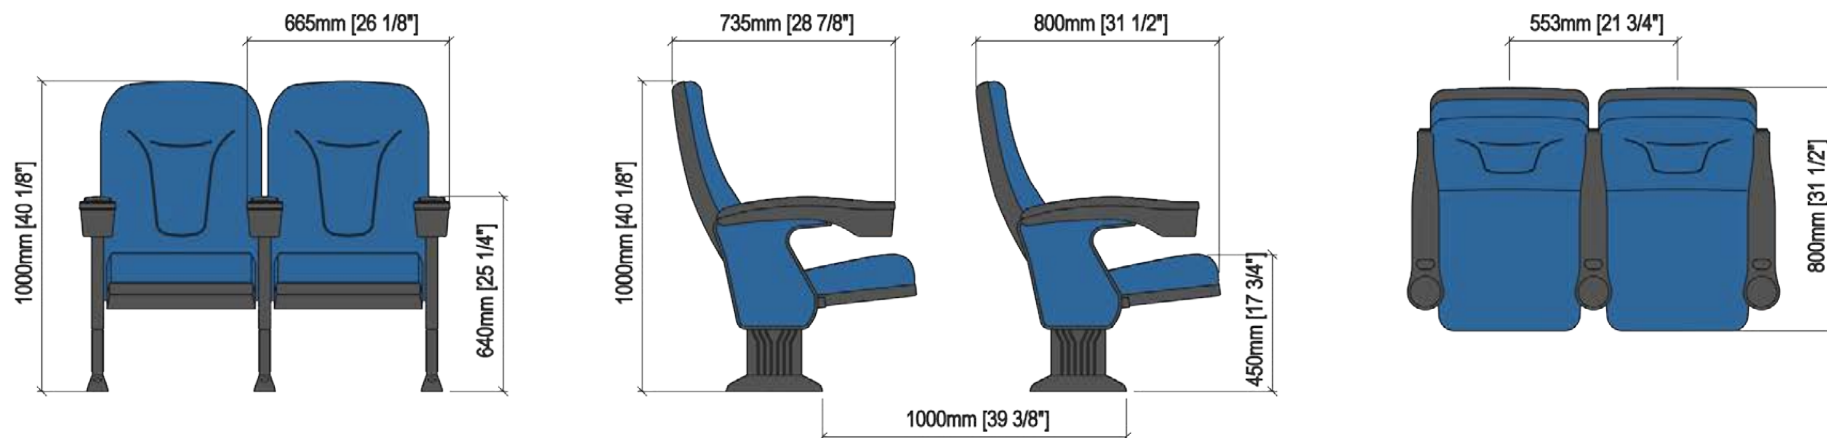

OPTIONS



Fixation to the floor



Slope




Movable seat



Ref 975 (more upright backrest)




Headrest



Embroidered logo



Row labels



Seating numbering



Tip-up seat

CERTIFICATES

BS 5852:2006

BS-EN 1021-1:2006

CAL TB 117-2013, SECTION 1

UNE 23.727-90 1R (M1)

UNE-EN 1021-1:2006 / UNE-EN 1021-2:2006

BS 5852:1979 Parte 1

Fabric	Fire Barrier	Foam
•		
•		
•		
•	•	
•	•	•
	•	

