


TECHNICAL SPECIFICATIONS




- Dimensions:** 54-56 cm seat centres
51 cm depth
98.5 cm height
- Backrest:** Fully upholstered by means of a fabric cover, made up of an open cell polyurethane foam block and a solid wood frame with thin canvas strips. All this structure is protected by a compressed wood cover. Foam density, 40 Kg/m³.
- Seat:** Cold moulded polyurethane foam, which wraps an injected polypropylene frame completely. It is later upholstered by means of a fabric cover. The seat pan folds by means of an automatic noiseless maintenance-free double spring. Polyurethane density 65 Kg/m³.
- Side panel:** Wood fibres board, finish in beech.
Anti-panic polystyrene writing pad system with interior steel structure, located in the interior of the side panel. Concealed floor fixation system by means of a steel plinth.
- Armrest:** Included in the very side panel.
- Volume:** 0.160 m³/unit
- Weight:** 24.20 Kg not assembled

THALES PL

DRAWING

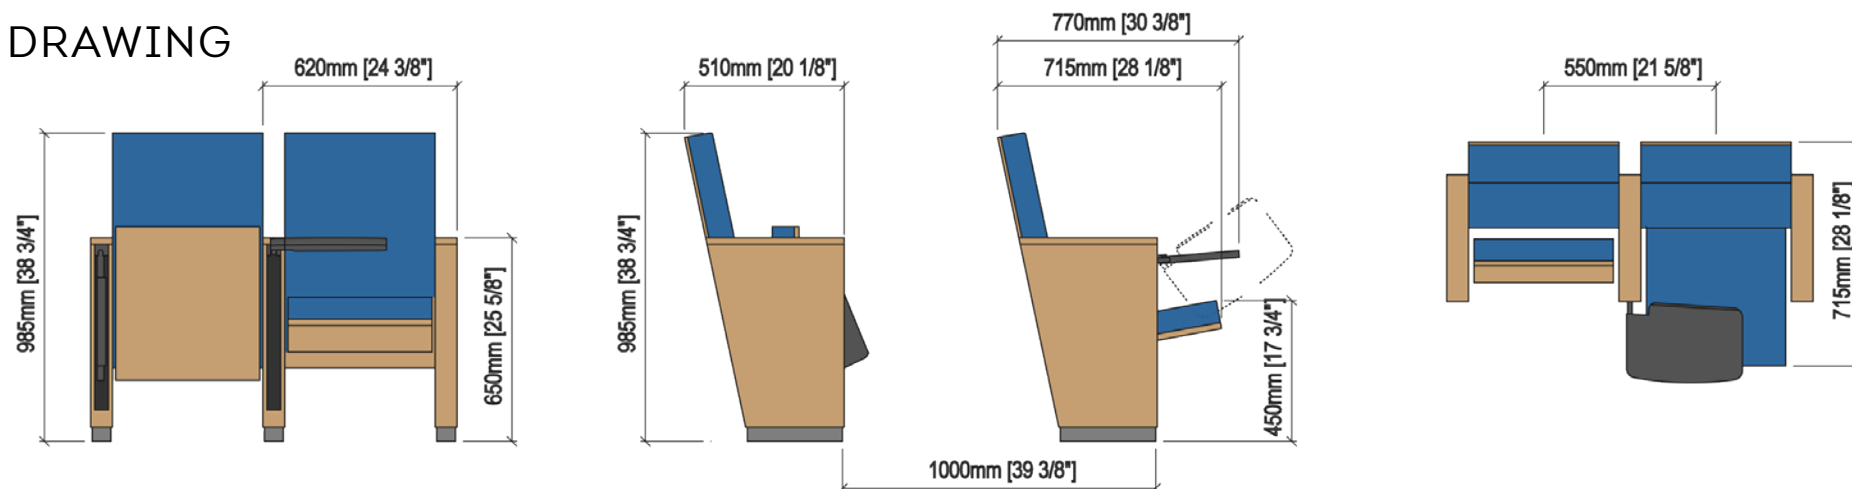

OPTIONS

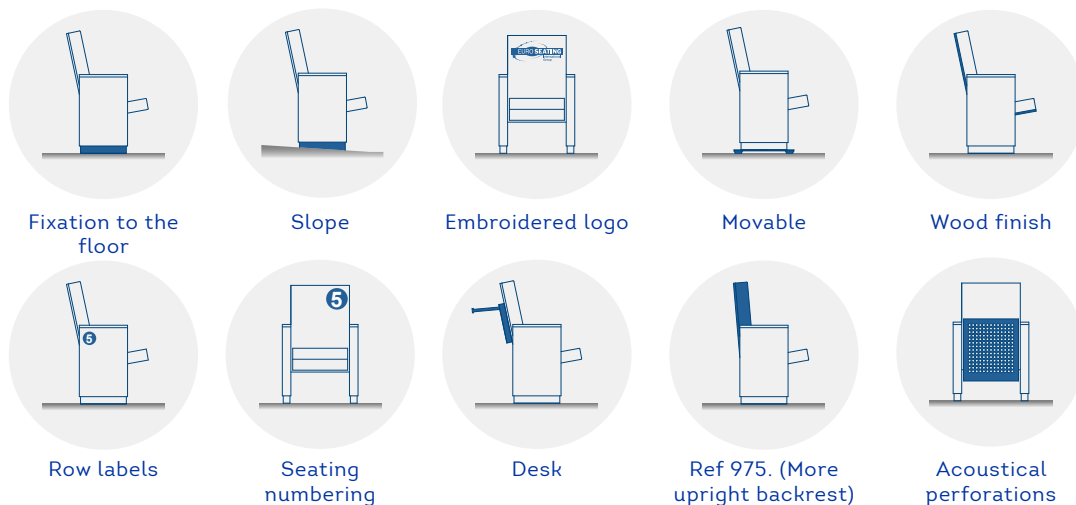

CERTIFICATES

BS 5852:2006
BS-EN 1021-1:2006
CAL TB 117-2013, SECTION 1
UNE 23.727-90 1R (M1)
UNE-EN 1021-1:2006 / UNE-EN 1021-2:2006
Acoustic absorption
BS 5852:1979 Parte 1

Fabrics	Fire barrier	Foam	Seat
•			
•			
•			
•	•		
•	•	•	•
			•
	•		

AIDIMA
INSTITUTO TECNOLÓGICO
MUEBLE, MADERA, EMBALAJE Y VINOS

fmo
FEDERATION OF MODULAR OFFICE
FURNITURE ASSOCIATION



Euro Seating reserves the right to modify the dimensions and characteristics without prior notice. All dimensions and specifications are given for information purposes only.