

TECHNICAL SPECIFICATIONS



Dimensions: 55 - 57 cm seat centres
52.5 cm depth
95 cm height

Backrest: Fully upholstered by means of a fabric cover, made up of an open cell polyurethane foam block and a solid wood frame with thin canvas strips. All this structure is protected by a compressed wood cover. Foam density, 40 Kg/m³.

Seat: Cold moulded polyurethane foam, which wraps an injected polypropylene frame completely. It is later upholstered by means of a fabric cover. The seat pan folds by means of an automatic noiseless maintenance-free double spring. Polyurethane density 65 Kg/m³.


Side panel: Texturized injected polypropylene, 70mm. End row panels by laminated 3D finish with LYF system. Concealed floor fixation system.

Armrest: Rectangular texturized injected polypropylene, optionally by laminated 3D finish with LYF system.


Volume: 0.15 m³ / unit

Weight: 19.7 Kg not assembled

DRAWING

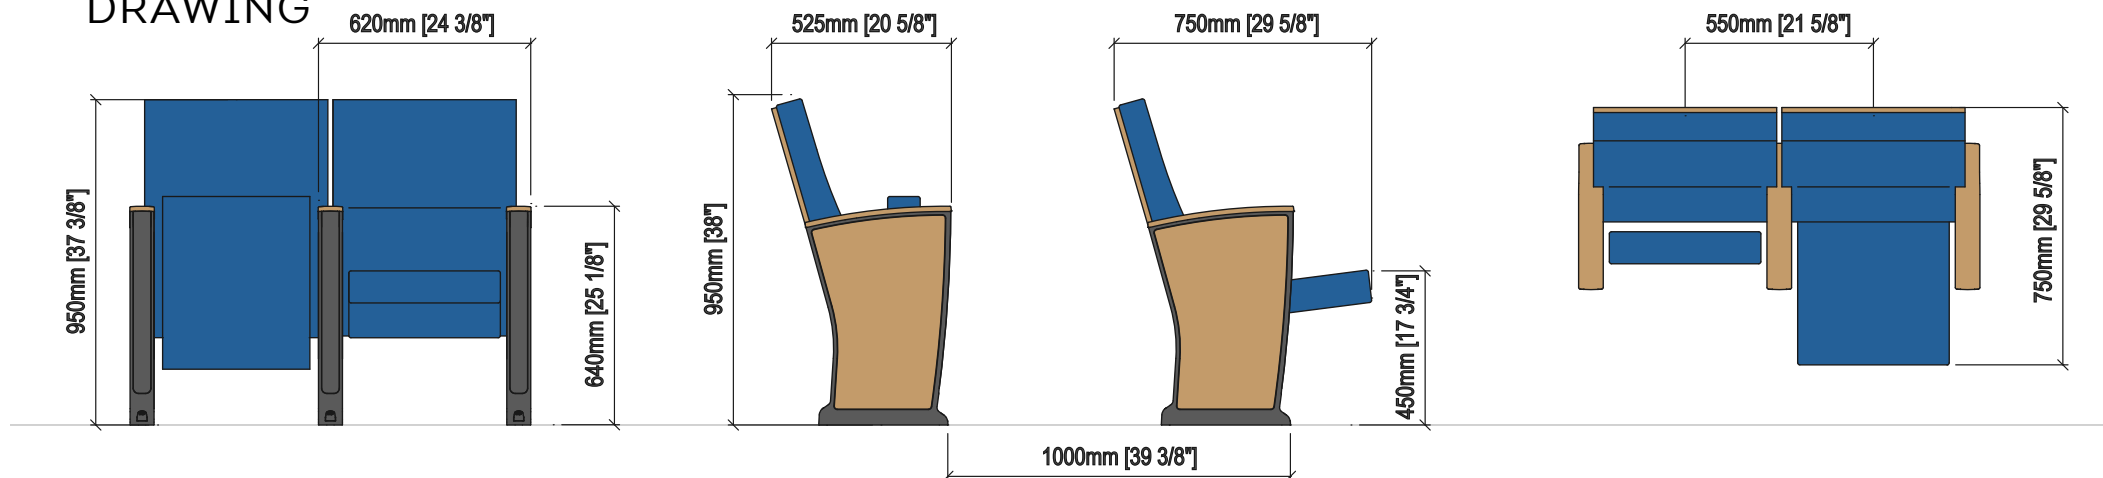

OPTIONS

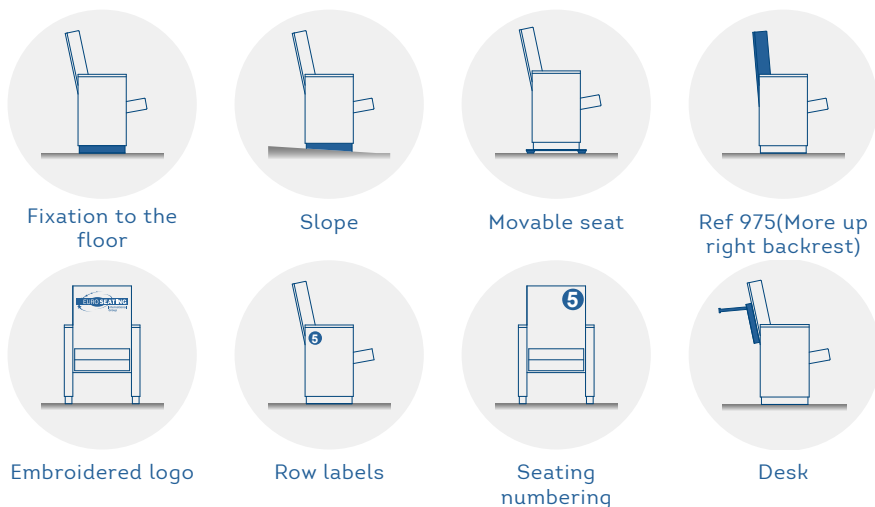

CERTIFICATES

BS 5852:2006
BS-EN 1021-1:2006
CAL TB 117-2013, SECTION 1
UNE 23.727-90 1R (M1)
UNE-EN 1021-1:2006 / UNE-EN 1021-2:2006
BS 5852:1979 Parte 1

Fabrics	Fire barrier	Foam	Seat
•			
•			
•			
•	•		
•	•	•	•
	•		