

THALES PLUS PL


TECHNICAL SPECIFICATIONS




- Dimensions:** 55- 57 cm seat centres
52.5 cm largo
95 cm alto
- Backrest:** Fully upholstered by means of a fabric cover, made up of an open cell polyurethane foam block and a solid wood frame with thin canvas strips. All this structure is protected by a compressed wood cover. Foam density, 40 Kg/m³
- Seat:** Cold moulded polyurethane foam, which wraps an injected polypropylene frame completely. It is later upholstered by means of a fabric cover. The seat pan folds by means of an automatic noiseless maintenance-free double spring. Polyurethane density 65 Kg/m³.
- Side panel:** Texturized injected polypropylene, 70mm. Anti - panic polystyrene writing pad system with interior steel structure, located in the interior of the side panel. End row panels by laminated 3D finish with LYF system. Concealed floor fixation system.
- Armrest:** Rectangular texturized injected polypropylene optionally by laminated 3D finish with LYF system.
- Volume:** 0.15 m³ /unit
- Weight:** 21.7 Kg not assembled

THALES PLUS PL

DRAWING

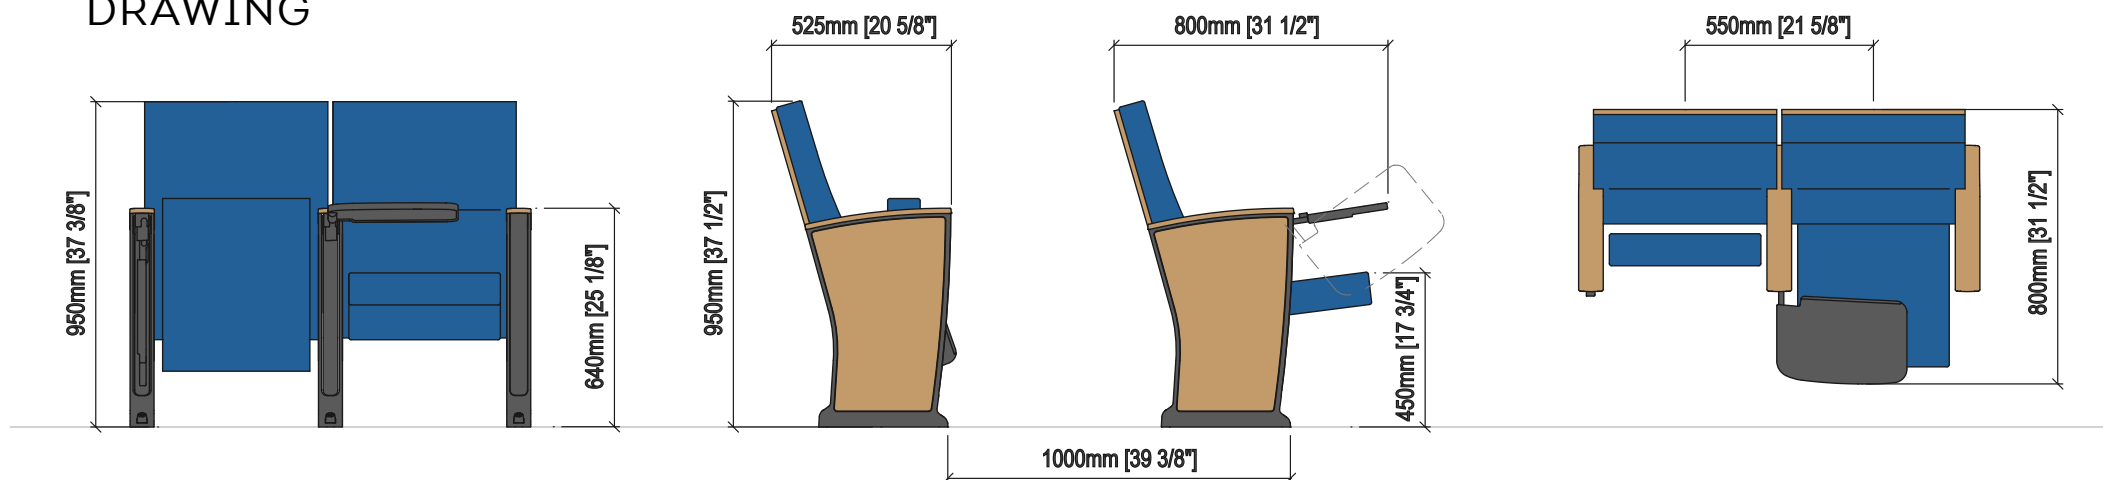

OPTIONS

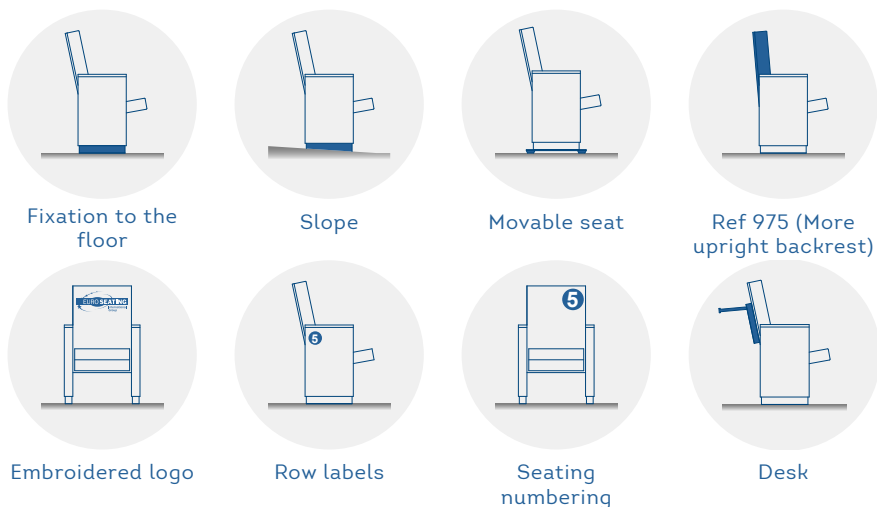

CERTIFICATES

BS 5852:2006
BS-EN 1021-1:2006
CAL TB 117-2013, SECTION 1
UNE 23.727-90 1R (M1)
UNE-EN 1021-1:2006 / UNE-EN 1021-2:2006
BS 5852:1979 Parte 1

Fabrics	Fire barrier	Foam	Seat
•			
•			
•			
•	•		
•	•	•	•
	•		

AIDIMA
INSTITUTO TECNOLÓGICO
MUEBLE, MADERA, EMBALAJE Y VITRIS

fmo
FURNITURE MARKING ORGANIZATION



Euro Seating reserves the right to modify the dimensions and characteristics without prior notice. All dimensions and specifications are given for information purposes only.