





TECHNICAL SPECIFICATIONS

- Dimensions:** 56 - 58 cm seat centres
50 cm depth
100 cm height
- Backrest:** Cold moulded polyurethane foam 'UNIBLOCK 2' system, which wraps an injected polypropylene frame completely. All this structure is protected by a texturized injected polypropylene seat shell.
Polyurethane density 55 Kg/m³
- Seat:** Cold moulded polyurethane foam 'UNIBLOCK 2' system, which wraps an injected polypropylene frame completely. All this structure is protected by a texturized injected polypropylene seat shell.
The seat pan folds by means of an automatic noiseless maintenance-free double spring.
Polyurethane density 65 Kg/m³
- Side panel:** Extrusion blow moulded in texturized high-density polyethylene, 60mm
End row panels completely upholstered.
Concealed floor fixation system.
- Armrest:** Optionally in wood.
- Volume:** 0.18 m³ / unit
- Weight:** 19.00 Kg not assembled

DRAWING

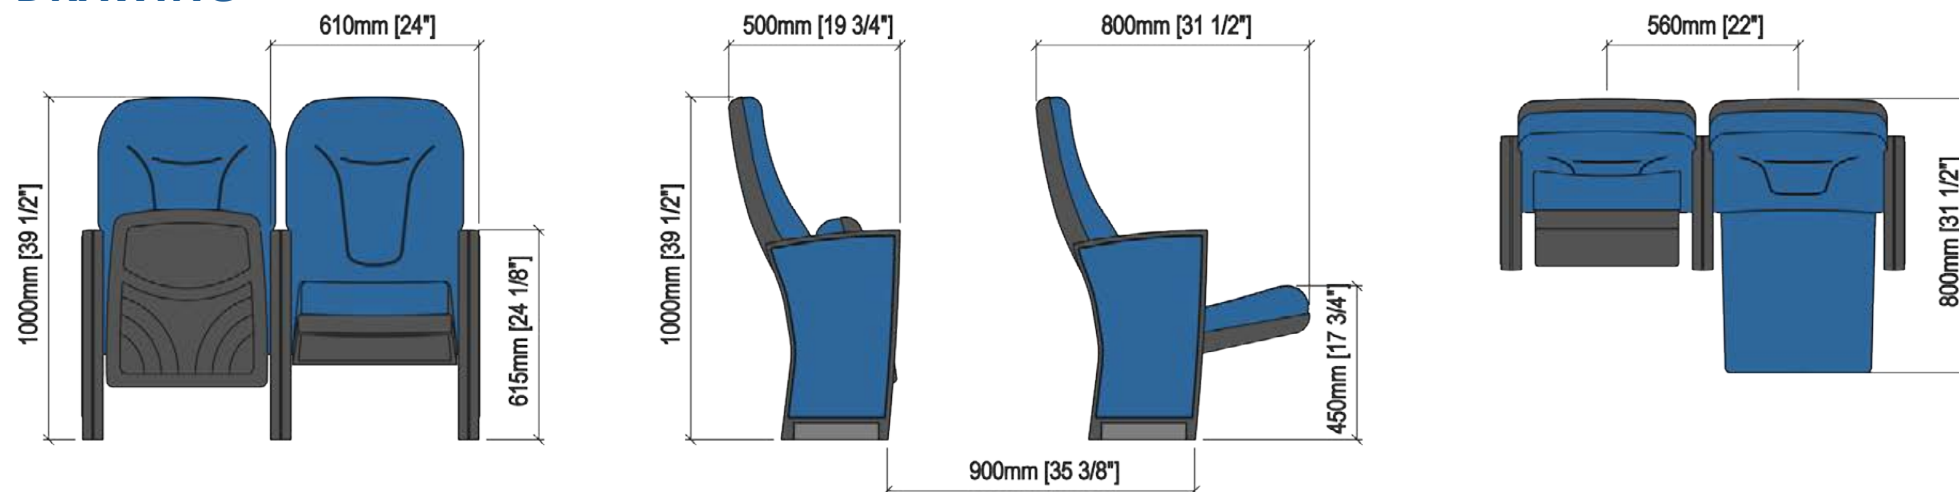

OPTIONS

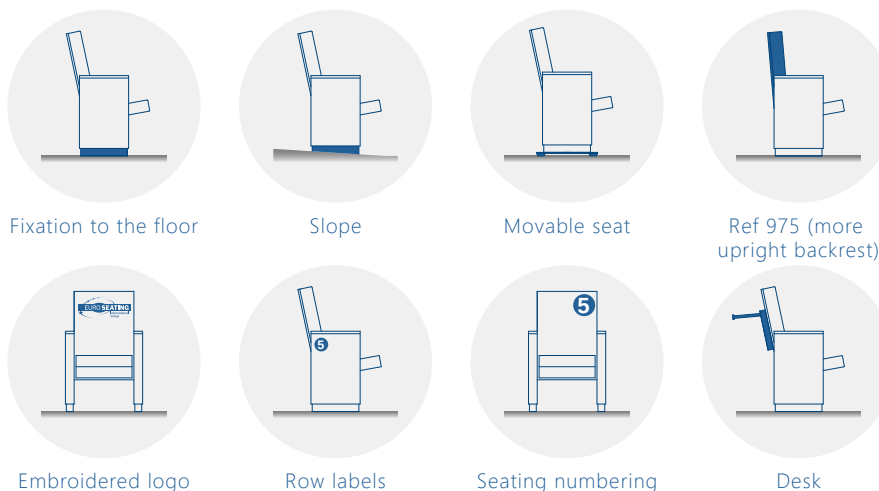

CERTIFICATES

BS 5852:2006
BS-EN 1021-1:2006
CAL TB 117-2013, SECTION 1
UNE 23.727-90 1R (M1)
UNE-EN 1021-1:2006 / UNE-EN 1021-2:2006
BS 5852:1979 Parte 1

Fabric	Fire Barrier	Foam
•		
•		
•		
•	•	
•	•	•
	•	