

TECHNICAL SPECIFICATIONS



Dimensiones: 52-54 cm seat centres
47 cm depth
90 cm height

Backrest: Manufactured over a MDF board, bowed in roof tile-shaped, on which an open cell polyurethane foam block upholstered by means of a fabric cover is fixed. All this structure is protected by a wood covering and a perimeter frame in beech compressed wood. Foam density, 40 Kg/m³.

Seat: Manufactured over a MDF board, bowed in roof tile-shaped, on which an open cell polyurethane foam block upholstered by means of a fabric cover is fixed. All this structure is protected by a wood covering and a perimeter frame in beech compressed wood. The seat pan folds by means of an automatic noiseless maintenance-free double spring. Foam density, 40 Kg/m³.


Side panel: Wood fibres board, finish in beech. Steel central leg. Concelaed floor fixation system.

Armrest: Straight-shaped varnished solid wood.


Volume: 0.140 m³/unit

Weight: 17.00 Kg not assembled

DRAWING

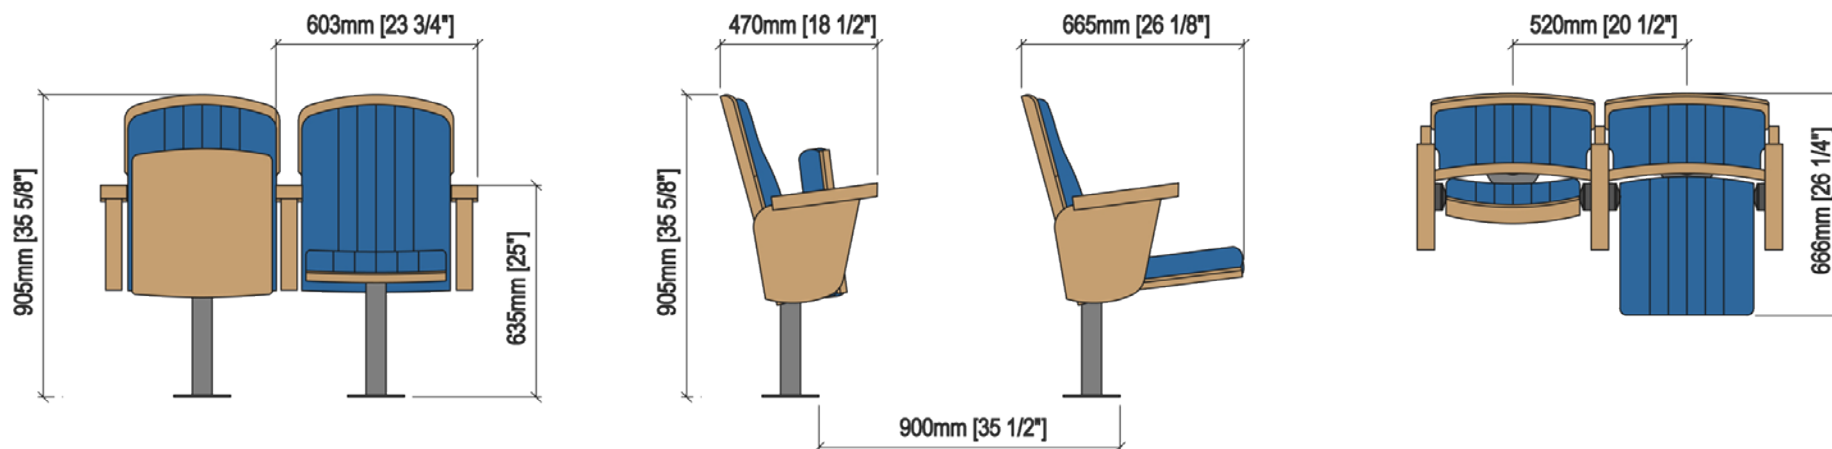

OPTIONS

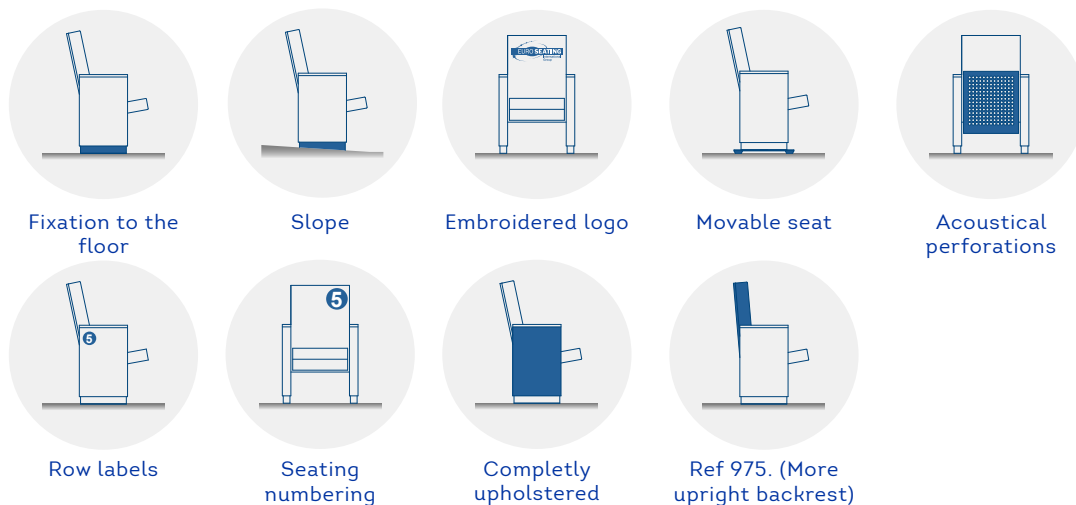

CERTIFICATES

BS 5852:2006
BS-EN 1021-1:2006
CAL TB 117-2013, SECTION 1
UNE 23.727-90 1R (M1)
UNE-EN 1021-1:2006 / UNE-EN 1021-2:2006
BS 5852:1979 Parte 1
Coeficiente de absorción acústica

Fabrics	Fire Barrier	Foam	Seat
•			
•			
•			
•	•		
•	•	•	•
	•		
			•