



Performance

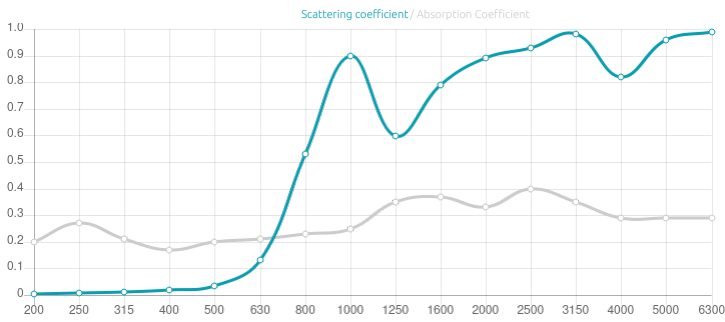

Technical Information

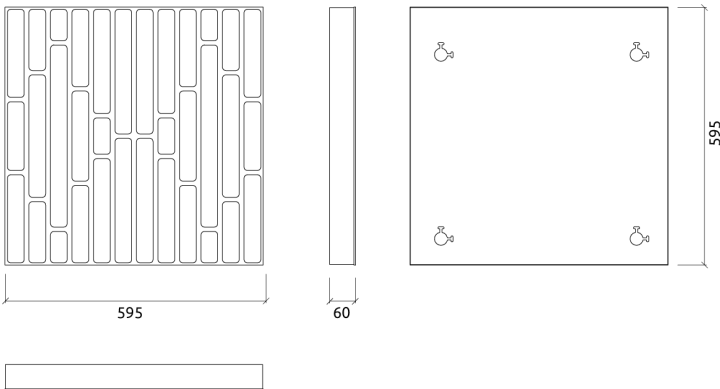

Features

Type: 2D - QRD Diffuser

Scattering range: 600 Hz to 6000 Hz

This product is available in the following Fire Rate:
FG | Furniture Grade

PRODUCT COMPOSITION:

Logan | Natural wood veneer
- Natural wood veneer
- HMDf and plywood structure

Logan | Lacquered HMDf
- Lacquered HMDf
- HMDf and plywood structure

Dimensions:

FG - LW | 595x595x60mm | 4.56 Kg
FG - NW | 595x595x60mm | 4.6 Kg

Logan Diffuser provides diffusion over any bandwidth, given the precise width and depth of the integrated surface treatment. The scattering begins at 400 Hz and goes up to 4000 Hz. Usable for all noise control, but above all for musical applications. Logan is a high quality and high-performance solution for broadcasting, recording or post-production studios, and music practice rooms. With a furniture grade quality and available in several woods and finishes.

Product finishes

(FG - LW) Lacquered Wood Finishes



FG | (L06) Noir Vintage



FG | (L10) Bronze



FG | (L20) Grey Aluminium



FG | (L21) Gloss White



FG | (L21) Gloss White |
White Interior



FG | (L22) Jet Black



FG | Custom RAL

(FG - NW) Natural Wood Finishes



FG | (W04) Fagus | Fagus
Interior



FG | (W08) Wenge Natura



FG | (W09) Black Walnut
Natura



FG | (W11) Okoumé
Natura



FG | (W12) Ash Natura



FG | (W13) Oak Natura



Purpose

- Enlarging sweet spot
- Specular reflection control
- Flutter echo control

Recommended for

- Control room
- Recording room
- Home studio
- Broadcast studio
- Drum room