

# CELANOVA PL DESK


## TECHNICAL SPECIFICATIONS

- Dimensions:** 55-56 cm seat centres  
55.5 cm depth  
105 cm height
- Backrest:** Beech solid wood structure over which a MDF board is fixed and in turn, an open cell polyurethane foam block, upholstered by means of a fabric cover, is also fixed.  
Anti-panic bookrest in laminated wood, fixed to the backrest by means of a hinge. The opening is made by means of a simple vertical turn.  
Foam density, 40 Kg/m<sup>3</sup>
- Seat:** Cold moulded polyurethane foam, which wraps an injected polypropylene frame completely. It is later upholstered by means of a fabric cover. The seat pan folds by means of an automatic noiseless maintenance-free double spring.  
Polyurethane density 65 Kg/m<sup>3</sup>
- Side panel:** Wood fibres board, finish in beech. Anti-panic polystyrene writing pad system with interior steel structure, located in the interior of the side panel. Concealed floor fixation system by means of a steel plinth.
- Armrest:** Included in the very side panel.
- Volume:** 0.190 m<sup>3</sup>/unit
- Weight:** 30.50 Kg not assembled




# CELANOVA PL DESK

## DRAWING

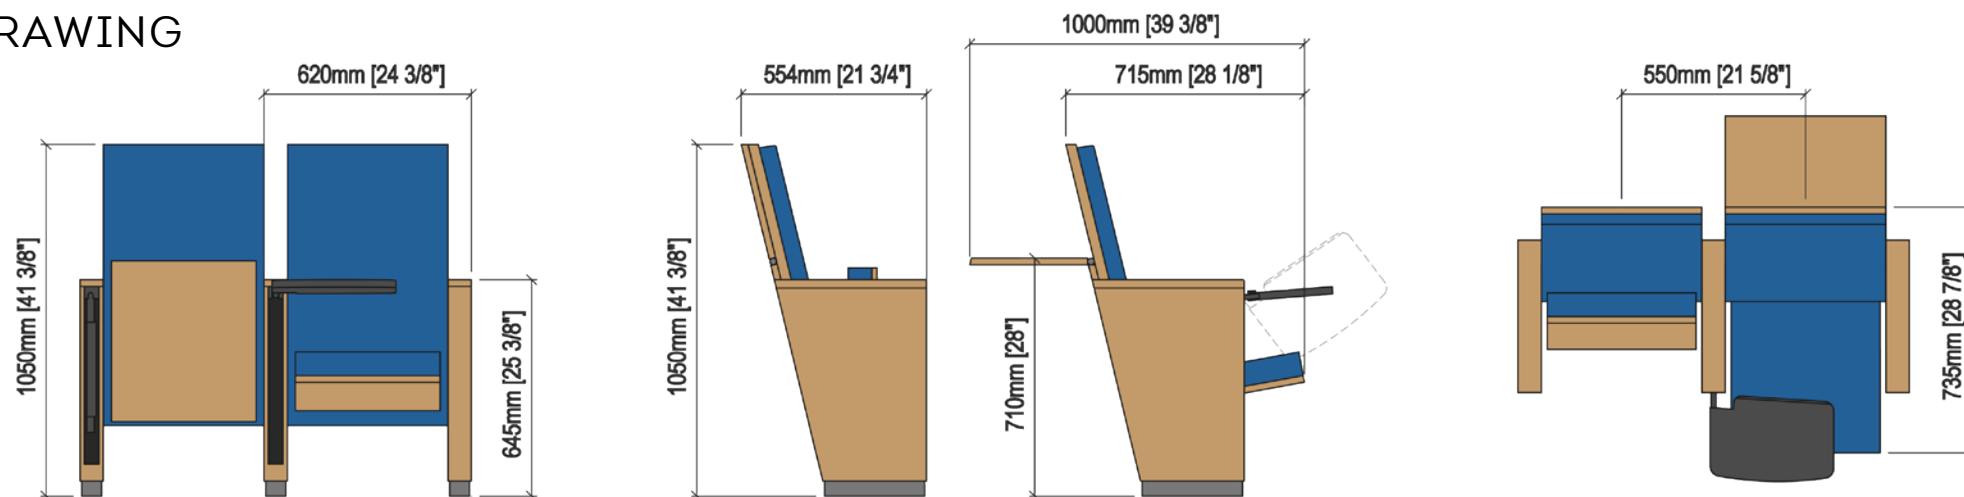

## OPTIONS

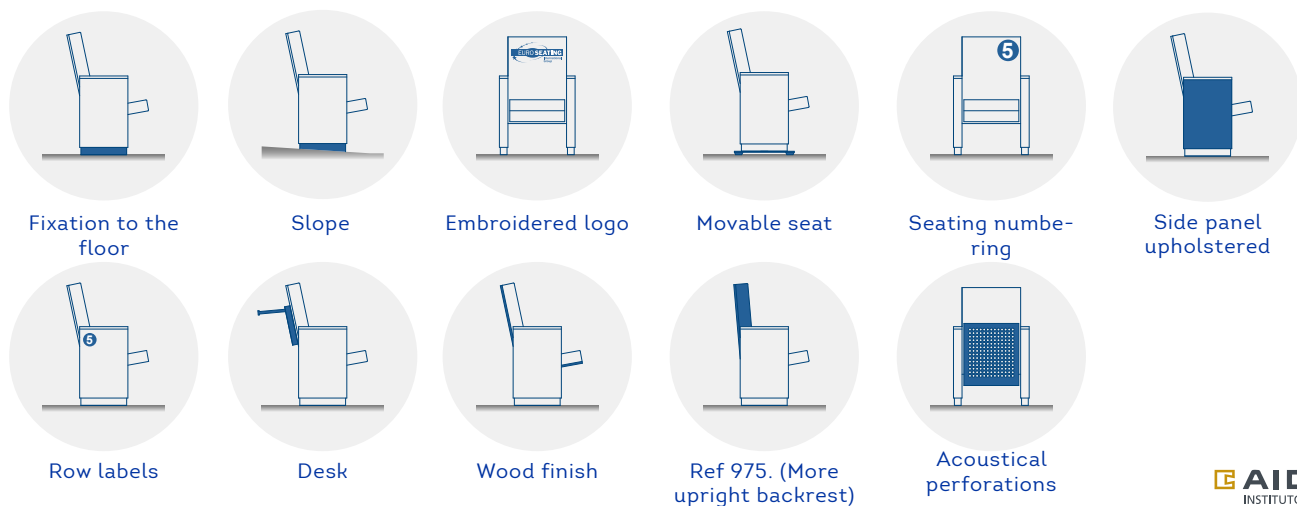

## CERTIFICATES

BS 5852:2006  
BS-EN 1021-1:2006  
CAL TB 117-2013, SECTION 1  
UNE 23.727-90 1R (M1)  
UNE-EN 1021-1:2006 / UNE-EN 1021-2:2006  
BS 5852:1979 Parte 1

| Fabrics | Fire Barrier | Foam | Seat |
|---------|--------------|------|------|
| •       |              |      |      |
| •       |              |      |      |
| •       |              |      |      |
| •       | •            |      |      |
| •       | •            | •    | •    |
|         | •            |      |      |